

PCB Code Reader Station / LP Codelese-Station

- Automatic XY positioning, top and/or bottom
Automatische XY-Positionierung, oben und/oder unten
- Adjustable stopper and sensor
Einstellbarer Stopper und Sensor
- Front-Door
Tür vorn



PCB Dimension [mm] / LP-Abmaße		Option
Length	100 - 447	535
Width	50 - 410	50 - 460
Thickness	0,8 - 3,0	
height top	50	
" bottom	50	
PCB -Edge	3	
Transport height	950 +/-45	

Machine Dimension [mm] / Masch.-Abmaße		Option
Length (front)	600 oder 800 1)	
Width (depth)	900	
Height	1355 1600 incl. LCD	
Weight	150 kg	

Materials / Material		Option
Main Structure	Sheet metal	
Color	RAL 7035	
Transp. Sheet	ESD - Polycarbonate	

Belt conveyor / Förderband		Option
DC-Motor	Speed-regulator	
	seperate in/out	
Belt	flat, antistatic	

1) Length 600mm
 800mm

PC incl. SW-Application
Barcode, DataMatrix Code

PCB Capacity / LP Kapazität		Option
Qty. Conv.	1	

Operator panel / Bedienung		Option
HMI panel	Display	
PC incl. SW Application		X

Supply and Connections / Anschlüsse		Option
Voltage	230V 1L N PE 50Hz	
Power	120 W	
Interface	SMEMA	add. / others
Air pressure	No / Nein	0,5 MPa

Width adjustment / Breitenverstellung		Option
Belt	manual	automatic

XY-Adjustment / XY-Verstellung		Option
Option (Stepper)	manual	automatic

PLC / SPS		Option
System	Siemens S7-xxx	Line PC Network

Miscellaneous / Sonstiges		Option
Buzzer / Ton	Yes / Ja	
Stopper	Pneumatic	


X-axis moving distance ~ 330mm
X-axis moving distance ~ 530mm

Additional Options / zusätzliche Optionen:



- | | |
|--|--|
| <ul style="list-style-type: none"> - Transport flow direction from right to left - Additional Board sensor - Ultrasonic Board sensor - Signal light tower 1 lamp - Signal light tower 2 lamps - Additional SMEMA Interface | <ul style="list-style-type: none"> - Conveyer extension - Machine extension - add. belt conveyer - Additional Safety / Interlock switch - Additional belt segment - Safety panels |
|--|--|

■ Functional principle, layout dimensions
 Funktionsprinzip, Grundriss Abmaße

- PCB transport via belt conveyer
- LP Transport mit Förderbändern

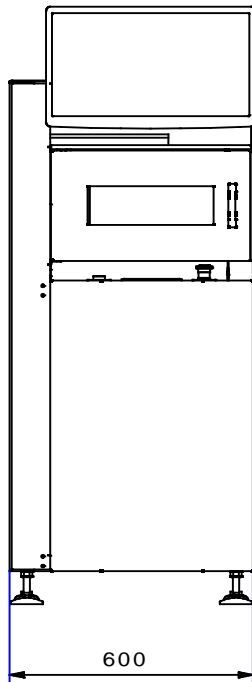

800mm (X stroke 530)

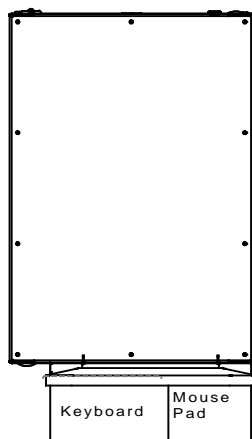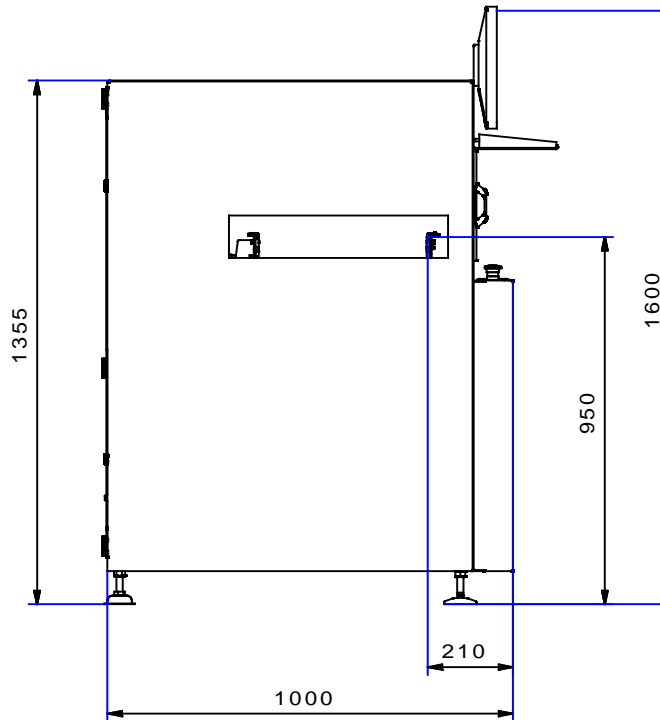

Keyboard	Mouse Pad
----------	-----------



Top Camera



Bottom Camera

